

BETTER

AC AXIAL FAN
225x225x80mm




General Specification

1. IMPELLER	ALL METAL 7 BLADES IRON LEAF
2. FRAME	ALUMINUM ALLOY
3. MOTOR	CAPACİTOR-INDUCTION MOTOR EXTERNAL ROTOR TWO SPEED (RPM)
4.OPERATION TEMPERATURE	-10C # +105C
5.SAFETY	CE>UL>CUL>TUV
6.WEIGHT	2100 g
7. PROTECTION	THERMAL PROTECTION
8.CONNECTING	WIRE LEADES & TERMINAL
9.LEAD WIRE	AWG # 22 UL 1007 (OPTİNAL)
10.ROHS COMPLIANCE	YES
11.EXPECTED LIFE	70C 70.000 HOURS

Specification

MODEL	RULMAN BİLYE SİSTEMİ	VOLTAJ	FREKANS	AKIM	GÜÇ	DEVİR	GÜRÜLTÜ SEVİYESİ	HAVA DEBİSİ		KONDANSATÖR	
	BEARING SYSTEM	VOLTAGE V	FREQ HZ	CURRENT A	POWER W	SPEED RPM	NOİSE dBA	M3/Hr	CFM	PHOSE	CAPACİTOR
FZY22580MA1B-C	BALL	100/125	50/60	0,7	80	2500/2850	65/68	1000/1150	588/676	1	4.0Mf/250v
FZY22580MA2B-C	BALL	220/240	50/60	0,4	80	2500/2850	65/68	1000/1150	588/676	1	2.2Mf/400v
FZY22580MA1B	BALL	380/420	50/60	0,28	80	2500/2850	65/68	1000/1150	588/676	3	/
FZY22580MA2B-C	BALL	380/420	50/60	0,32	80	2500/2850	65/68	1000/1150	588/676	1	2.2Mf/630v

Dimension

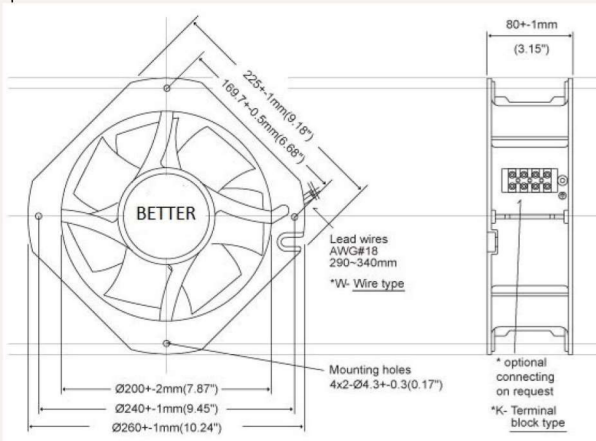

Air performance

